




## ASSEMBLY INSTRUCTIONS

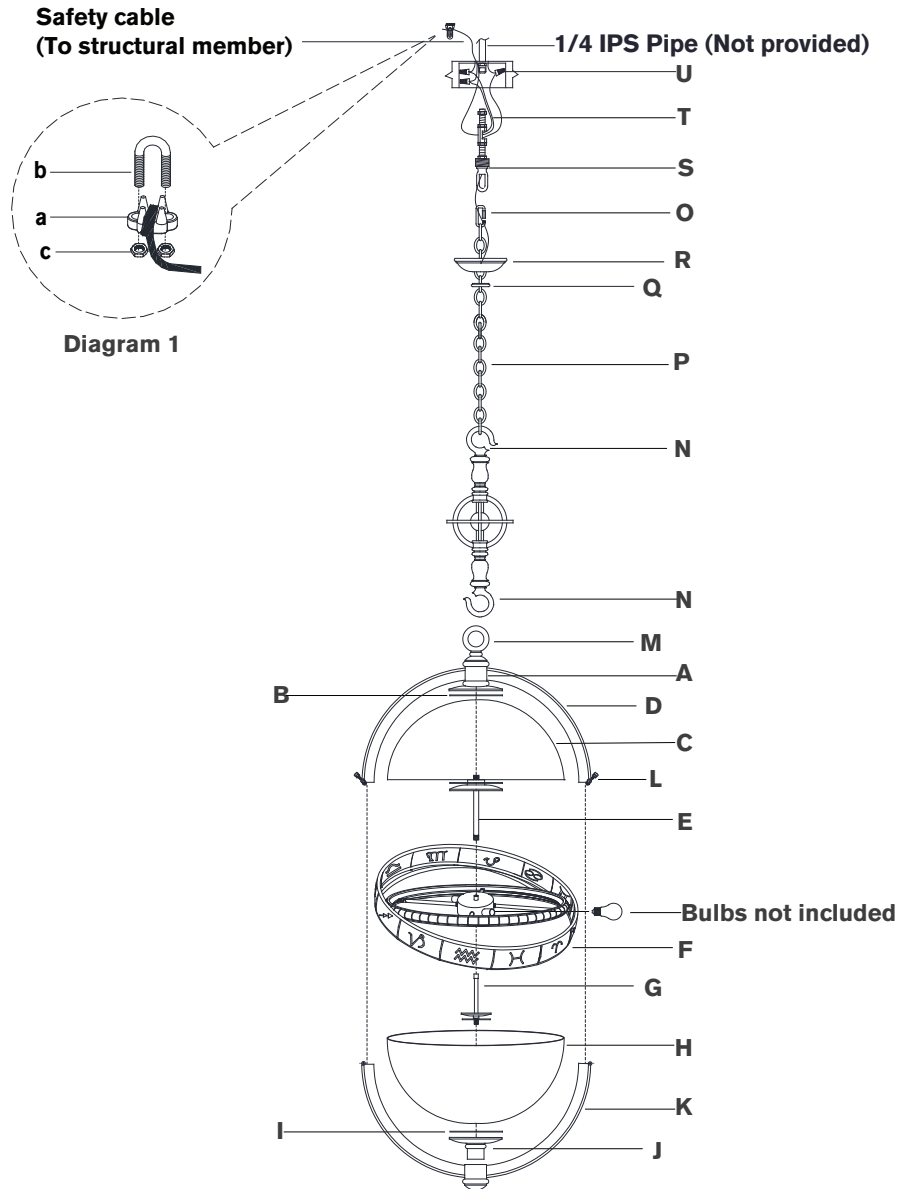

## Zodiac Lantern


Item # CHC2112

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

13. Remove finial (**J**) and rubber washer (**I**) from rod (**G**), then thread rod (**G**) to the bottom of fixture ring (**F**).
14. Install shade (**H**) to rod (**G**) and secure with rubber washer (**I**) and finial (**J**).  
**NOTE:** Do not over-tighten otherwise shade could become damaged.
15. Install bottom bracket (**K**) to top bracket (**D**) and secure with bolts (**L**).
16. Thread fixture wires and safety cable through hanging hook (**N**) and chain (**P**).
17. Run safety cable through junction box and around structural member of building. Wrap the safety cable around the saddle (**a**), and secure with u-bolt (**b**) and hex nuts (**c**). (See diagram 1).  
**NOTE:** When you reach the collar loop (**S**), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box
18. Separate two sides of molded wire, and strip insulation on each 5/8".
19. Loosen collar ring (**Q**) and let canopy (**R**) slip down chain (**P**) carefully.
20. Twist all fixture wires together. Slip through center hole of collar loop (**S**).  
**NOTE:** Untwist wires and separate to prepare for connection.
21. Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut (**U**).  
**NOTE:** It is imperative that the fixture is grounded.
22. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (**U**).

# ASSEMBLY INSTRUCTIONS

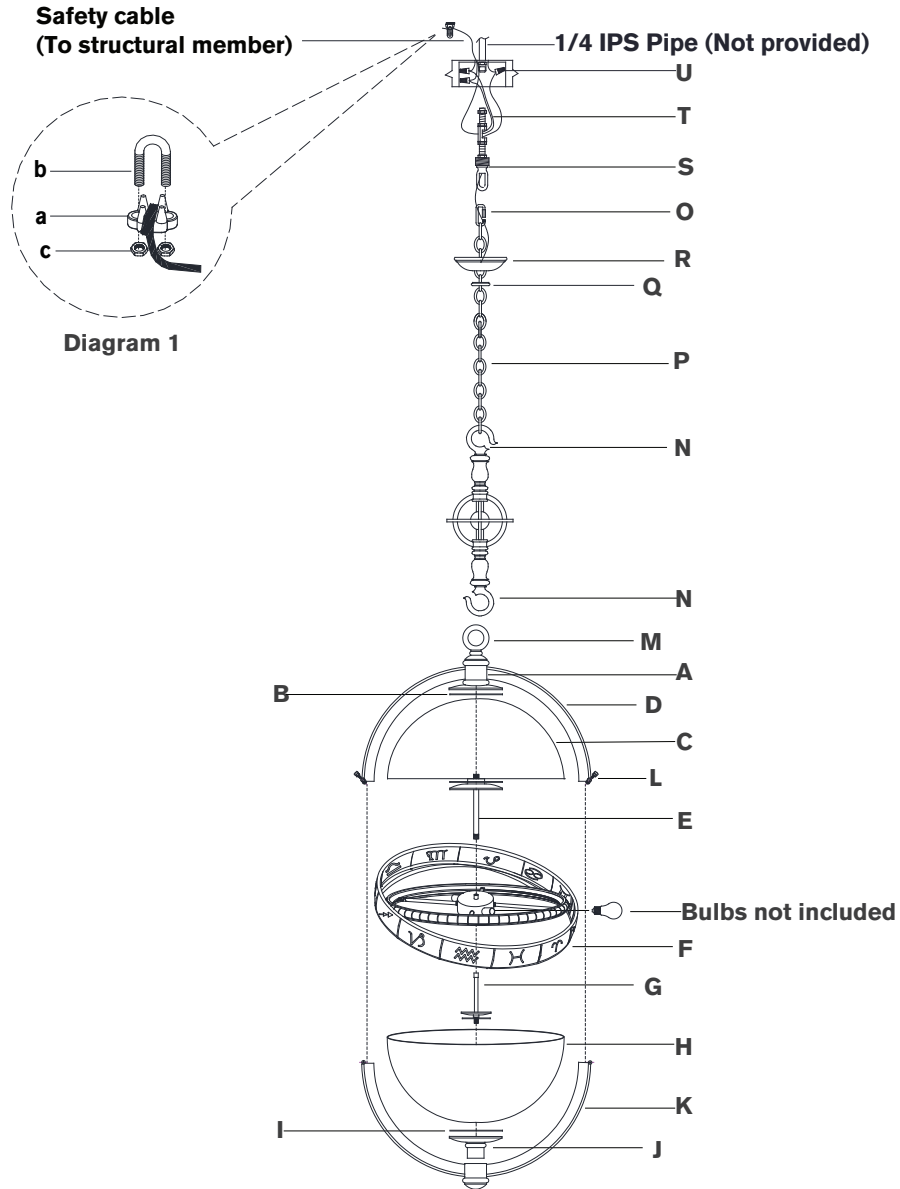

## Zodiac Lantern

Item # CHC2112

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

23. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(U)**.
- CAUTION:** Do not reverse the hot and neutral connections.
24. Make sure all wire connections are tight, then carefully tuck into the junction box.
25. Install canopy **(R)** to collar loop **(S)** and secure with collar ring **(Q)**.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.